

Rubio Monocoat Precolor Easy

Get creative, stay natural, love colours

Rubio Monocoat Precolor Easy is a pre-colour, designed to always be used in combination with the Rubio Monocoat Oil Plus 2C, to create special effects and contrasts. Enjoy unlimited creative possibilities thanks to the option to combine 14 different colours of Precolor Easy (which can be mixed with one another) with a finish in one of the 40 colours of the Oil Plus 2C range. At the same time, the optimal molecular bonding of the Oil Plus 2C with the wood remains guaranteed.



PRODUCT INFORMATION

› Specific characteristics

- Natural look
- Water-based pre-treatment
- 14 unique colours
- Ready to use
- Unlimited combinations possible (all colours can be mixed with one another)
- Can be applied to almost all wood types and wood species (solid wood, veneer, mdf, etc.)
- Can be applied to all interior wood surfaces (caution, not advised on worktops)

› Technical characteristics

- Physical state: liquid
- Flash point: > 60°C
- Density: 1,01 kg/L
- VOC content: 0 g/L
- Solubility in water: 100%

Drying time	± 12h The exact drying time depends on the surface, air humidity, temperature and ventilation.
Application information	All vertical and horizontal surfaces indoors
Consumption	10-15 m ² /liter*
Working temperature	15-25°C
Humidity at application range	35-60%
Wood humidity	8-12%
Storage	Min. + 5°C, max. +30°C

	The product can be stored up to 12 months in dry, frost-free conditions and in its original packaging.
Remarks	This product is a pre-treatment and does not protect the wood. It has to be combined with Rubio Monocoat Oil Plus 2C for maximum protection.

** These usages are merely indicative. Results depend on wood type, sanding and method of preparation. It is always recommended to make a sample in order to calculate the exact usage.*

> Colours



ALPACA WHITE



ANTIQUE BEIGE



CASHMERE BROWN



INTENSE BLACK



INTENSE GREY



MINT WHITE



MONSOON GREY



MYSTIC BROWN



NORDIC WHITE



PEBBLE GREY



SMOKED BROWN



URBAN GREY



VANILLA CREAM



VINTAGE BROWN

Colours only serve as an example. We recommend doing a test on identical sanded wood.

> Packaging

- Bottle 100 ml
- Can 1 L
- Can 2,5 L
- Can 5 L

> Storage

The product can be stored for up to 12 months. Store in dry conditions and in the original packaging. Keep away from frost.

APPLICATION INFORMATION

> Instructions for use

> Furniture and stairs

STEP 1. Sand the surface scratch-free. Finish with screening net 100 to 150, the colour intensity depends on the sanding method used.

- When renovating, you must remove all the residues from previous treatments completely (varnish, oil, wax, etc.).

STEP 2. Vacuum thoroughly and eliminate remains of dust with Rubio Monocoat Cleaner. Wait until the surface is completely dry (check the technical datasheet of the Cleaner before use).

STEP 3. Stir the product thoroughly and regularly with a stirring stick.

STEP 4. Apply an amount of Rubio Monocoat Precolor Easy with the Rubio Monocoat Brush and spread out using a red Rubio Monocoat Scrubby Pad. Wipe out evenly with a lint-free cloth. Work in small areas to avoid overlapping.

- For smaller objects and corners you can also use the green Rubio Monocoat Mouse Pad.

STEP 5. Allow the surface to dry for \pm 12 hours. The exact drying time depends on the foundation, moistening, temperature and ventilation.

STEP 6. After drying, break the raised wood fibres with a red Scrubby Pad and vacuum afterwards.

STEP 7. Now apply the Rubio Monocoat Oil Plus 2C. Please consult the technical data sheet of the oil for a correct application. Be careful, in combination with Precolor Easy it is best to use a white Scrubby Pad instead of a beige or red one when applying the oil!

> Floors

STEP 1. Sand the surface scratch-free. Finish with screening net 100, the colour intensity depends on the sanding method used.

- When renovating, you must remove all the residues from previous treatments completely (varnish, oil, wax, etc.).

STEP 2. Vacuum thoroughly and eliminate remains of dust with Rubio Monocoat Cleaner. Wait until the surface is completely dry (check the technical datasheet of the Cleaner before use).

STEP 3. Tape off areas of \pm 90 cm, in the lengthwise direction of the boards.

STEP 4. Stir the product thoroughly and regularly with a stirring stick.

STEP 5. Apply the Rubio Monocoat Precolor Easy with a Rubio Monocoat Microfiber Pad. Make sure to use enough of the product and cover the whole area. Afterwards smooth out the area again with the same Microfiber Pad. Make sure that this pad is thoroughly wrung out.

STEP 6. Now skip an area and follow the instructions in step 5 again for this next area. Finish the whole room in this way and remove the tape. Allow the surface to dry for ± 12 hours.

STEP 7. Now tape off the untreated areas and apply the Precolor Easy as described in step 5. Repeat until the whole floor is treated. Afterwards remove the tape (tip: step on the already dried out areas to remove the tape).

STEP 8. Allow the surface to dry for ± 12 hours. The exact drying time depends on the foundation, moistening, temperature and ventilation.

STEP 9. After drying, break the raised wood fibres with a floor polisher equipped with a red Rubio Monocoat Pad and vacuum afterwards.

STEP 10. Now apply the Rubio Monocoat Oil Plus 2C. Please consult the technical data sheet of the oil for a correct application. Be careful, in combination with Precolor Easy it is best to use a white Pad instead of a beige or red one when applying the oil!

> Industrial application

If you want to apply this product in an industrial manner, we advise you to get in contact with our technical service team.

› Tips & Tricks


- Stir the product well before application.
- When using several containers at one site, it is required to mix them for an even result.
- Switch off the floor heating 48 hours before application.
- Do not use in combination with water-based finishing products, such as Rubio Invisible Protector.
- Difficult to apply on herringbone parquet.
- Keep in mind that the wood type, grain structure and porosity of the wood can influence the end result. Therefore, it is important to make a sample first on the chosen wood species or the surface that needs treating.

› Consumption

10-15 m²/liter*

** These usages are merely indicative. Results depend on wood type, sanding and method of preparation. It is always recommended to make a sample in order to calculate the exact usage.*

› Tools

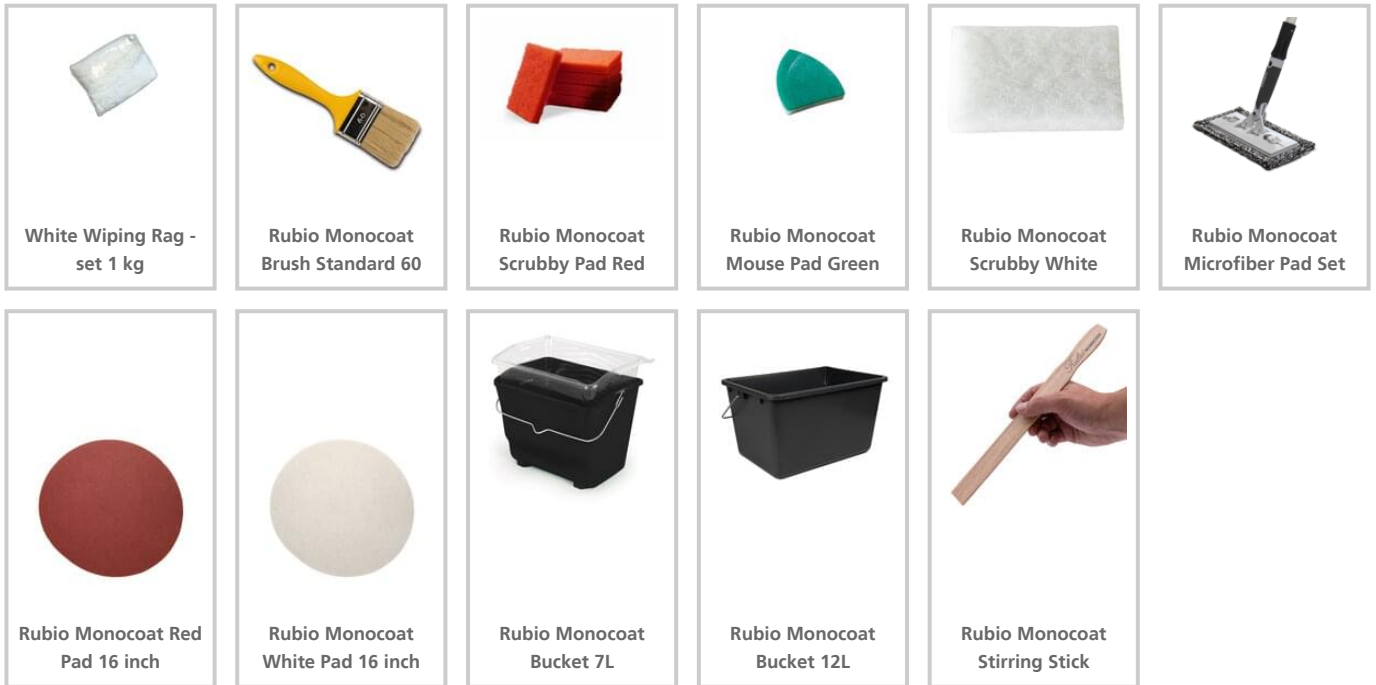

› Certificates



Check the packaging and the safety data sheet for more details.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit www.rubimonocoat.com

Your contact:

LIABILITY: It is the user's responsibility to establish, through his own tests, whether the product is suitable for the chosen application. In no case can Muylle Facon NV be held liable for any consequential damage. The information above may be subject to changes, which will be published in the updated versions of the technical data sheet. We cannot be held liable for poor results due to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website. **Date of TDS: 05/11/2021. Check the safety information before using the product.**



Rubio[®] MONOCOAT

MUYLLE  FACON

Muylle Facon NV

Ambachtenstraat 58

8870 Izegem (BELGIUM)

Phone +32 (0) 51 30 80 54

Fax +32 (0) 51 30 99 78

info@muyllefacon.be

www.rubimonocoat.com